

UNI-BELT & DUAL-BELT

Manufactured by:

CONVEY-ALL
INDUSTRIES INC.



UNI-BELT & DUAL-BELT

Convey up to 22,000 lbs (Dual-Belt) of material per minute with the powerful diesel-powered equipment. Featuring safety guarding throughout and optional hydraulic gate option.



UNI-BELT

Conveys 18,000 lbs per minute
Total weight of 19,500 lbs

Axle

25,000 lbs capacity

Brakes

ABS Brakes



Engine

80 HP Tier 4 diesel



Tires

11R22.5 with aluminum wheels

Dust Control

Uni-Belt and Dual-Belt options include an innovative dust control system. Our dust control systems are designed with health and ease of use in mind, and provide excellent control of silica dust. These options allow for cleaner, healthier job sites.



- Belt: Durowall cleated paddle belt 36" wide (Uni-Belt) or two 30" belts (Dual-Belt)
- Remote grease points for ease of maintenance
- Safety guarding throughout
- Trailer lighting: LED work lights: 4 - 4"
- Hydraulic pump: load sensing, variable displacement
- Conveyor bed height: 41.5"
- Total length: 52.5' • Width: 102" • Height: 11.92'
- Hydraulic requirements under load: 2850 PSI, 30 GPM
- Optional hydraulic gates
- Polished aluminum wheels
- Drive & idler roller shafts: 2 7/16"
- Carrier rollers: 4" diameter with double sealed bearing




DUAL-BELT

Standard tandem axles for 2014

Conveys 22,000 lbs per minute
Total weight of 26,000 lbs

Specifications

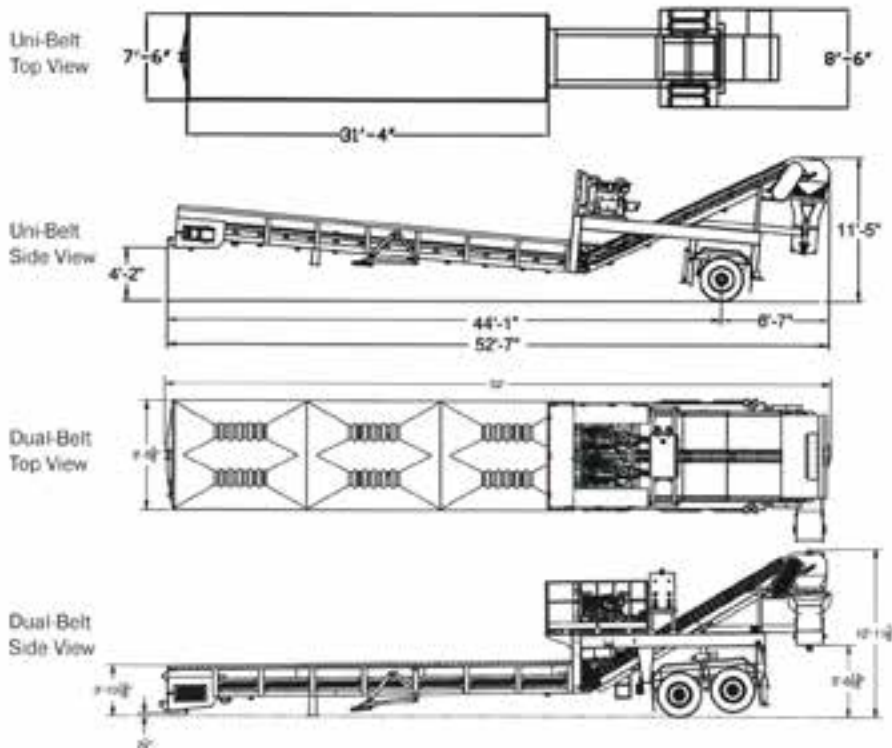

CONVEY-ALL
INDUSTRIES INC.

130 CANADA STREET
WINKLER MANITOBA R6W 0J3
CANADA
1-800-418-9461
P: (204) 325-4195
F: (204) 325-8116
convey-all.com

