

SandKing

Manufactured by:

CONVEY-ALL
INDUSTRIES INC.



STANDARD MODEL

ENGINEERED FALL PROTECTION

Maximum fall protection from innovative design which does not allow roof access hatches to be opened before safety rails are erected

TEXTURED TOP SURFACE

For increased slip protection

TOP BOLT-IN DEFLECTOR PLATES

LED WORK LIGHTING

For a bright, power-efficient and continuous light source at all operator stations



STEEL WHEELS

STABLE GROUND PADS

Positioned behind rear axles for increased stability and better center of gravity

HIGH CAPACITY CONVEYANCE SYSTEM

Conveys up to 10 ton per minute and designed without rollers for decreased maintenance

EFFICIENT FILL TUBES

Schedule 80 tubes for loading; easily replaced from outside of tank area

ENGINE

131 HP Tier 3 diesel engine
Brand options available upon request

MANUAL HYDRAULICS

OIL RESERVOIR

- 120 gallon capacity

PAINT

- Accent colour customizable
- No Engine Paint

PREMIUM MODEL

ENGINEERED FALL PROTECTION

Maximum fall protection from innovative design which does not allow roof access hatches to be opened before safety rails are erected

TOP BOLT-IN DEFLECTOR PLATES

TEXTURED TOP SURFACE

For increased slip protection

LED WORK LIGHTING

For a bright, power-efficient and continuous light source at all operator stations



EFFICIENT FILL TUBES

Schedule 80 tubes for loading; easily replaced from outside of tank area

ENGINE

Standard CAT 133 HP Tier 3 diesel engine
Brand options available upon request

ALUMINUM WHEELS

STABLE GROUND PADS

Positioned behind rear axles for increased stability and better center of gravity

ENCLOSED ELECTRICAL SYSTEMS

Full weather sealing allows for operation in all weather conditions

ARTICULATING DISCHARGE CONVEYOR

Allows for greater customization of site setup around the blender

HIGH CAPACITY CONVEYANCE SYSTEM

Conveys up to 10 ton per minute and designed without rollers for decreased maintenance

DUST COLLECTION AVAILABLE

INVENTORY MANAGEMENT

Digital scales provides accurate weighing feedback to operators




SAFETY

The SandKing has been designed for safe and effective frac sand handling. The innovative tank interior includes gate safety guards, which prevents stepping onto the gate and reduces surge shock onto belt from falling sand.



SAFETY RAILS

- Meets and exceeds OSHA safety requirements
- Hatches inaccessible without raised rail
- Easy lift/lock and lift/lower design for one-man operation

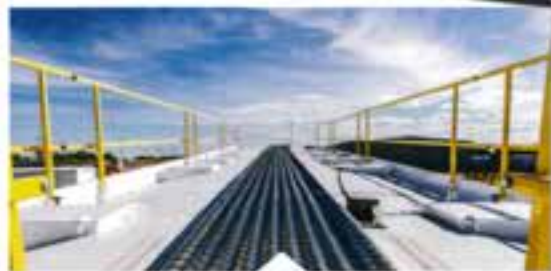

ENGINEERED FALL PROTECTION

- Safety cable
- Galvanized steel catwalk
- Anti-slip paint
- Upper operating station safety accessible and well lit for night-time use

DUST COLLECTION OPTION



SECURE ACCESS HATCHES

- 24" x 18" openings
- 2" raised lip from top of tank to eliminate moisture entry
- Secure rubber latches with rear-to-front openings prevent lids from opening during transport
- Safety screen installed to restrict access into compartment




STABLE GROUND PADS

- Front: Large stationary pad with load bearing area of 70 sq. ft.
- Rear: Moveable pads located behind the axles for optimum stability
- 15" minimum road clearance during transport
- Mechanic screw jack operated hydraulic motor

EFFICIENT DESIGN

Articulating rear conveyor and bolt-on directional spout allows for maximum use of space when setting up your site. This allows for more SandKings to be set up on site, increasing the available sand. A two-pump hydraulics design (Premium Model) allows for one pump to operate the conveyor drives while the second pump operates lift and gate cylinders. Hydraulics are a simple design, for ease of replacement with standard components.

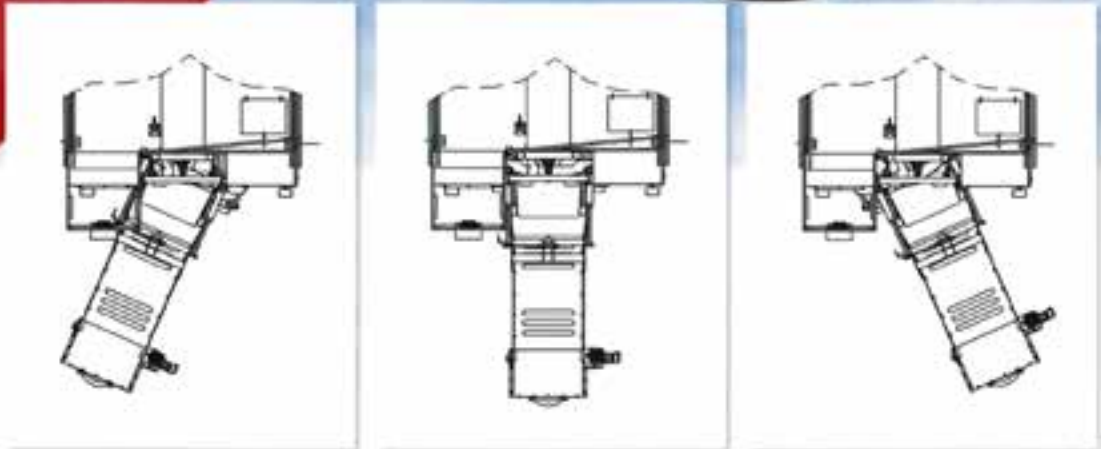

LOADING & UNLOADING

SandKing's unique design uses no intermittent bed rollers, greatly reducing down time related to replacing worn-out rollers. The tank interior is designed to deliver maximum clean-out with a clean interior design and minimum 40 degree slopes. Non-slip tread ladders allow for safe access into each compartment.



ARTICULATE REAR CONVEYOR (PREMIUM MODEL)

Hydraulic cylinders control rear conveyor movements

WIDE BELT DESIGN


3 ply belt design and super screw lacing for long lasting durability

LOW PROFILE TROUGH DESIGN


Conveyor bed is designed without rollers, reducing maintenance time and costs

SPECIFICATIONS

EUROPEAN CERTIFIED SIZES AVAILABLE (SK-2000)

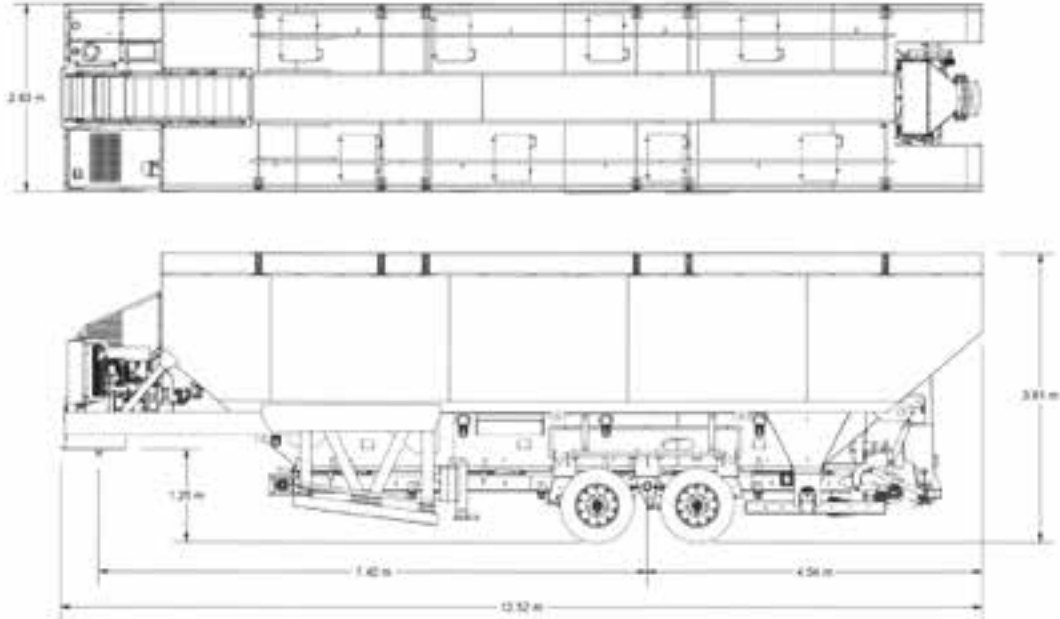


STANDARD MODEL (SK-3013)

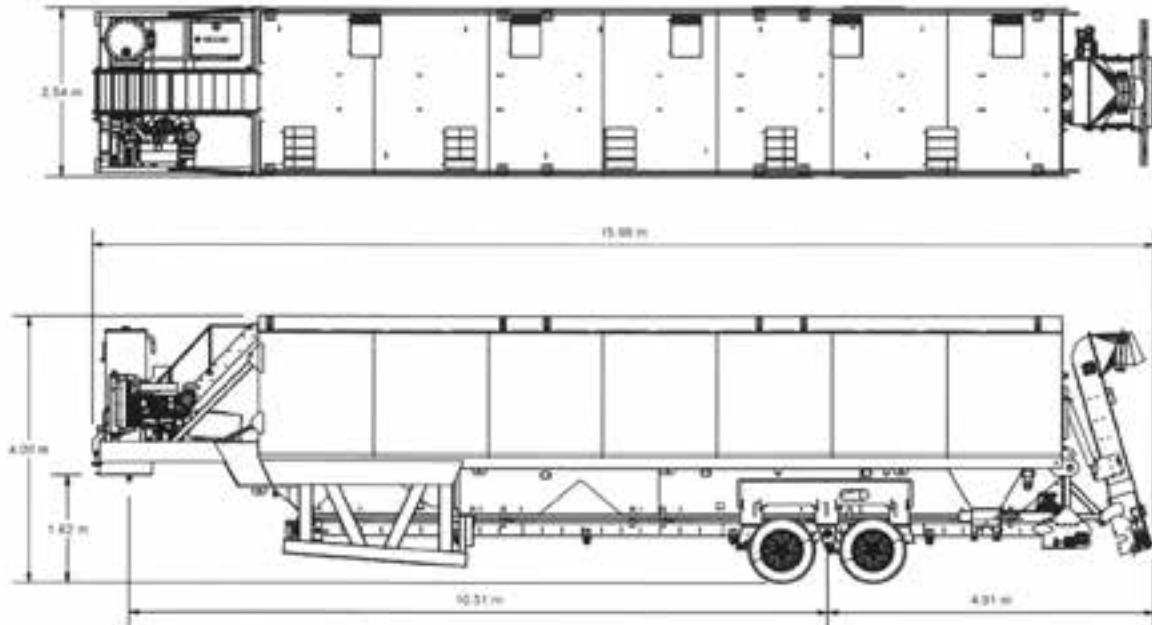

Cubic Feet	3,000
Height	13' 6"
Width	8' 6"
Length	52' 9"
Total Weight	40,860 lbs


STANDARD MODEL (SK-4013)

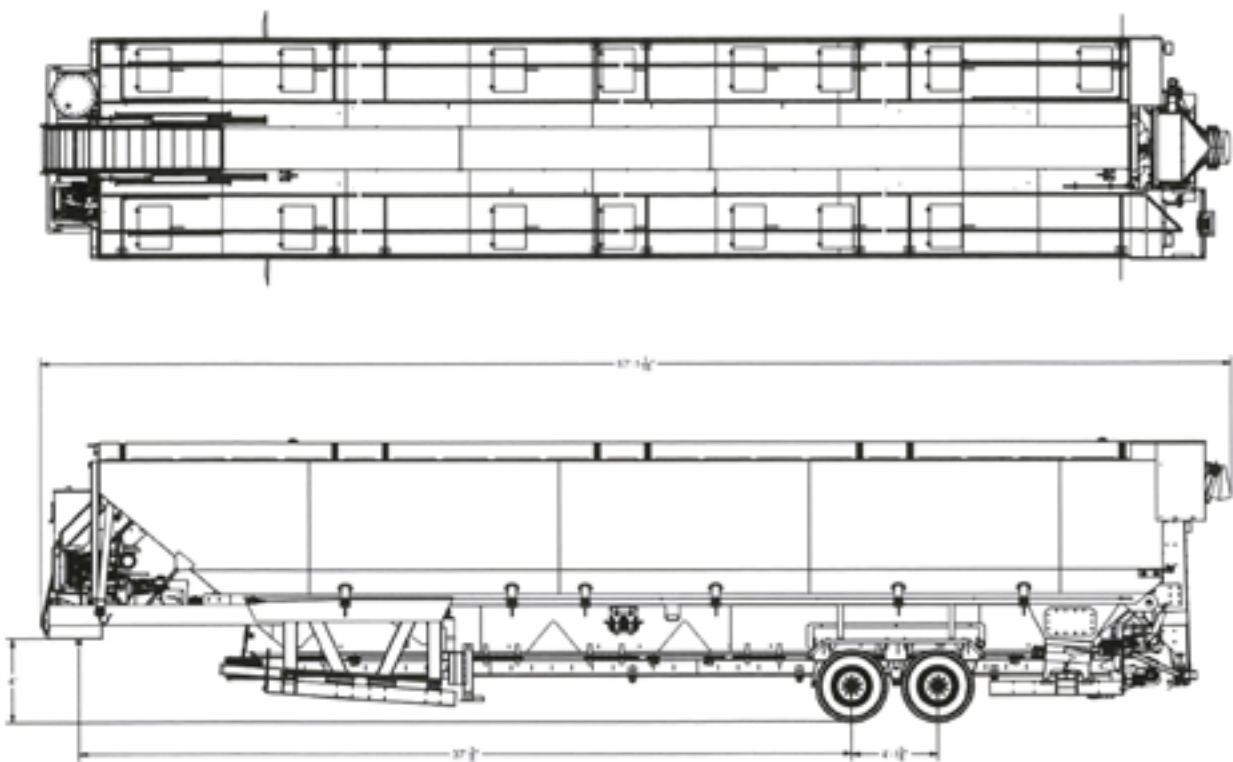

<i>Cubic Feet</i>	4,000
<i>Height</i>	13' 5"
<i>Width</i>	10' 6"
<i>Length</i>	56' 9"
<i>Total Weight</i>	50,740 lbs


SPECIFICATIONS

PREMIUM MODEL (SK-3000)

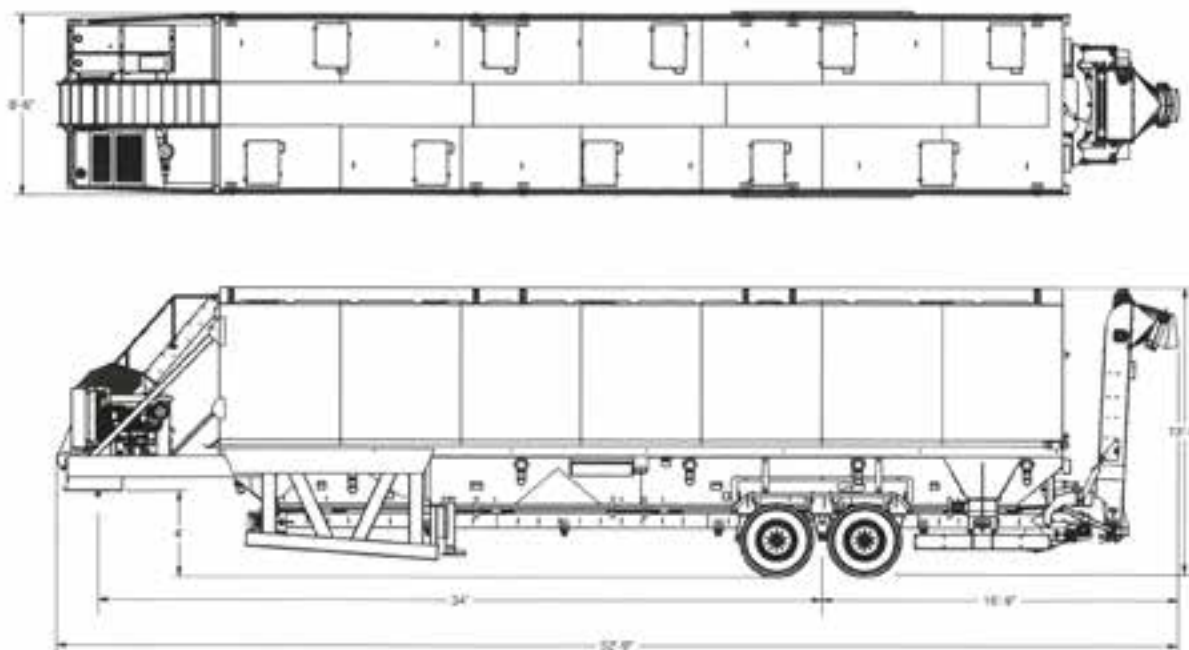

<i>Cubic Feet</i>	3,000
<i>Height</i>	13' 6"
<i>Width</i>	8' 6"
<i>Length</i>	52' 9"
<i>Total Weight</i>	40,860 lbs

PREMIUM MODEL (SK-4000)

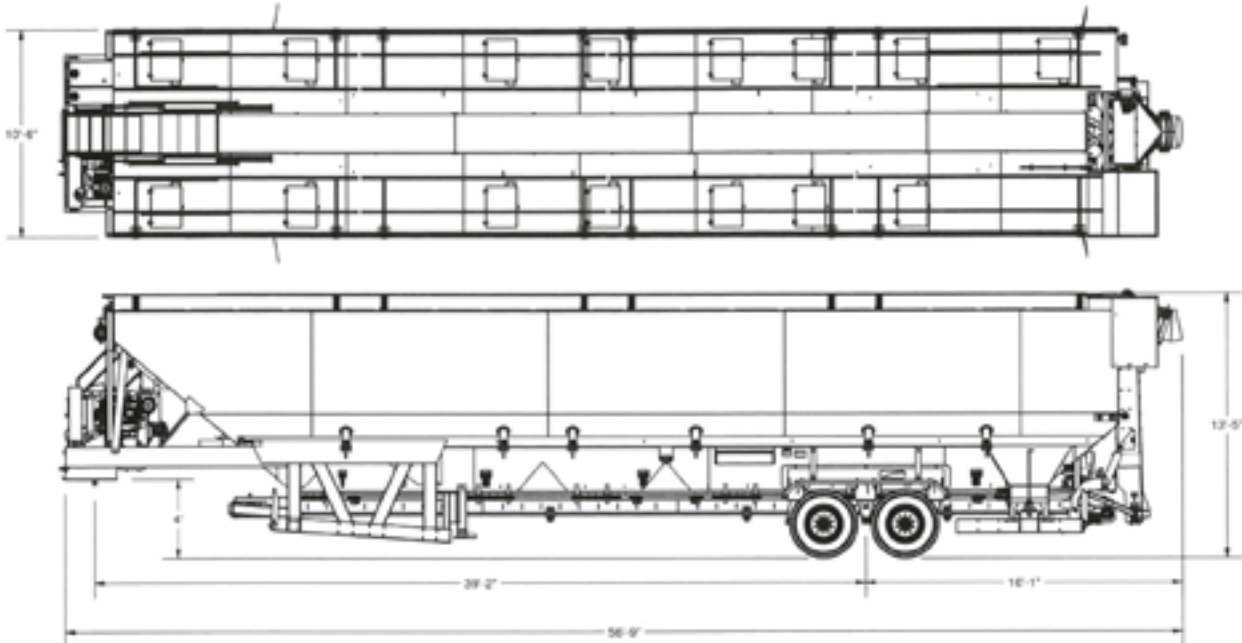

Cubic Feet	4,000
Height	13' 5"
Width	10' 6"
Length	56' 9"
Total Weight	50,740 lbs

EUROPEAN SIZES AVAILABLE UPON REQUEST

CONVEY-ALL
INDUSTRIES INC.

130 CANADA STREET
WINKLER MANITOBA R6W 0J3
CANADA
1-800-418-9461
P: (204) 325-4195
F: (204) 325-8116
convey-all.com

