



**Intercomp
Wireless Seed Tender Remote
Programming Guide**

v0.2

**Convey-All Industries Inc
130 Canada St, Box 2008
Winkler, MB R6W 4B7, Canada**

(204) 325-4195

1-800-418-9461

Fax: (204) 325-8116

info@convey-all.com

convey-all.com

Reset to Factory Defaults

IMPORTANT

It is very important to turn off all units nearby before you start with this procedure. All wireless devices (control box and handheld) within 500 feet have to be turned off and disconnected from the power supply.

Procedure

1. Turn off all devices and disconnect from power
2. Open the control box, unscrew and take off the lid
3. Press the black Reset Button and do not release
4. Turn back on the power on the wireless control box
5. Release the black Reset Button after 20 seconds
6. Turn on the handheld and enter the configuration menu by clicking ZERO + SETUP
7. Scroll down to the wireless settings and press SETUP
8. Now set the parameters to the following values:
CHANNEL: 04
PAN ID: 8000
ENC KEY: 00000
9. Confirm the confirmation by clicking SETUP again
10. Wait about 30 seconds until the configuration has been transferred successfully to the control box
11. Leave the configuration menu by clicking ZERO + SETUP at the same time

Change wireless PAN ID

IMPORTANT


It is very important to turn off all units nearby before you start with this procedure. All wireless devices (control box and handheld) within 500 feet have to be turned off and disconnected from the power supply.

Procedure

1. Turn off all devices and disconnect from power
2. Open the control box, unscrew and take off the lid
3. Turn on the power on the wireless control box and handheld
4. Go to the settings menu on the handheld by clicking ZERO+SETUP
5. Scroll down with the cursor keys to the RADIO SETTINGS and press SETUP
6. Change the values by using the UP and DOWN cursor and press SETUP to proceed to the next setting
NOTE: Please DO NOT change the channel or encryption key unless you know what you are doing!
7. Wait about 30 seconds until the configuration has been transferred successfully to the control box
8. Leave the configuration menu by clicking ZERO + SETUP at the same time

Appendix

Handheld

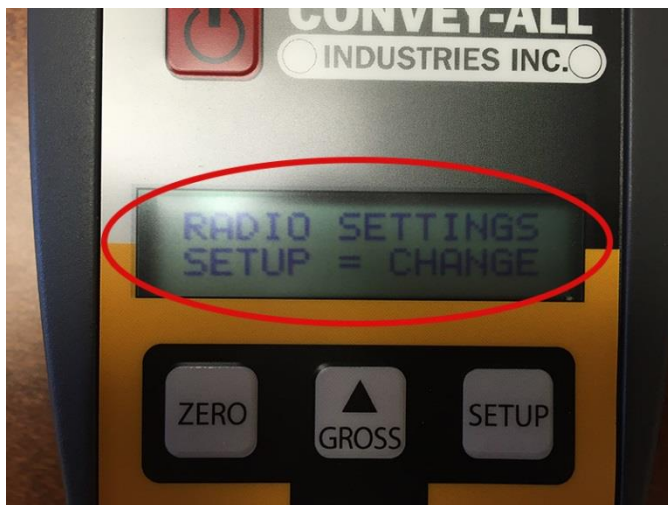

Wireless Control Box

